



Polysec Coldrooms Limited
 Blackpole Trading Estate West
 Hindlip Lane
 Worcester, WR3 8TJ. UK.

POLYURETHANE (PUR) INSULATED PANELS

PANEL INFORMATION SHEET 2 OF 2 – JANUARY 2004

FAX No (01905) 754137

(01905) 458551


All panels are foam injected rigid polyurethane with cam operated locks, tongue and groove edge details. The metal faces may be either flat or shallow ribbed profile, (shallow ribbed profile is standard).

All panels are to dimensions as below with either :
 White Foodsafe laminated PVC (**W**)
 Self colour galvanised steel (**G**)
 British standard coloured steel (**C**)

Panels are produced in thicknesses of : **75mm & 100mm.**

Corner panels are produced in lengths up to **4.000 m**

All Rebate and Thermal break details are the same as for 1200 wide panels see Information Sheet No:1 of 2.

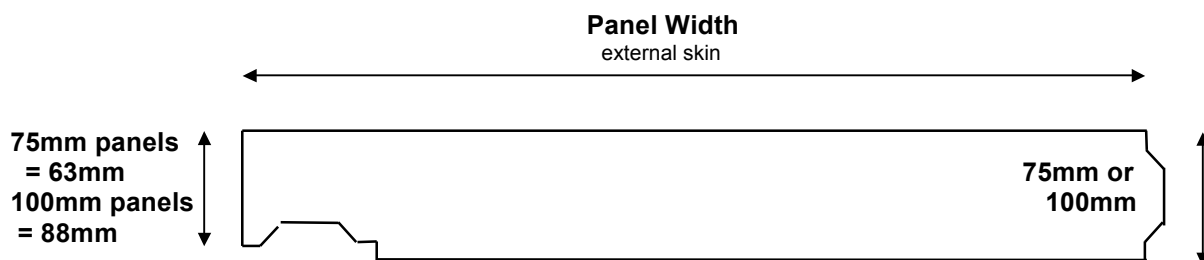

75mm Panels

Panel widths : 337mm 437mm 537mm 637mm 737mm 837mm 937mm 1037mm 1137mm

100mm Panels

Panel widths : 312mm 412mm 512mm 612mm 712mm 812mm 912mm 1012mm 1112mm

Combinations of the above corner panels, together with "special" wall panel widths of – 1100, 1000, 900, 800 & 400mm will give a modular coldroom size every 100mm.

Information is given for guidance only and may change without notice.