


polysec

Compact Mortuary Chamber

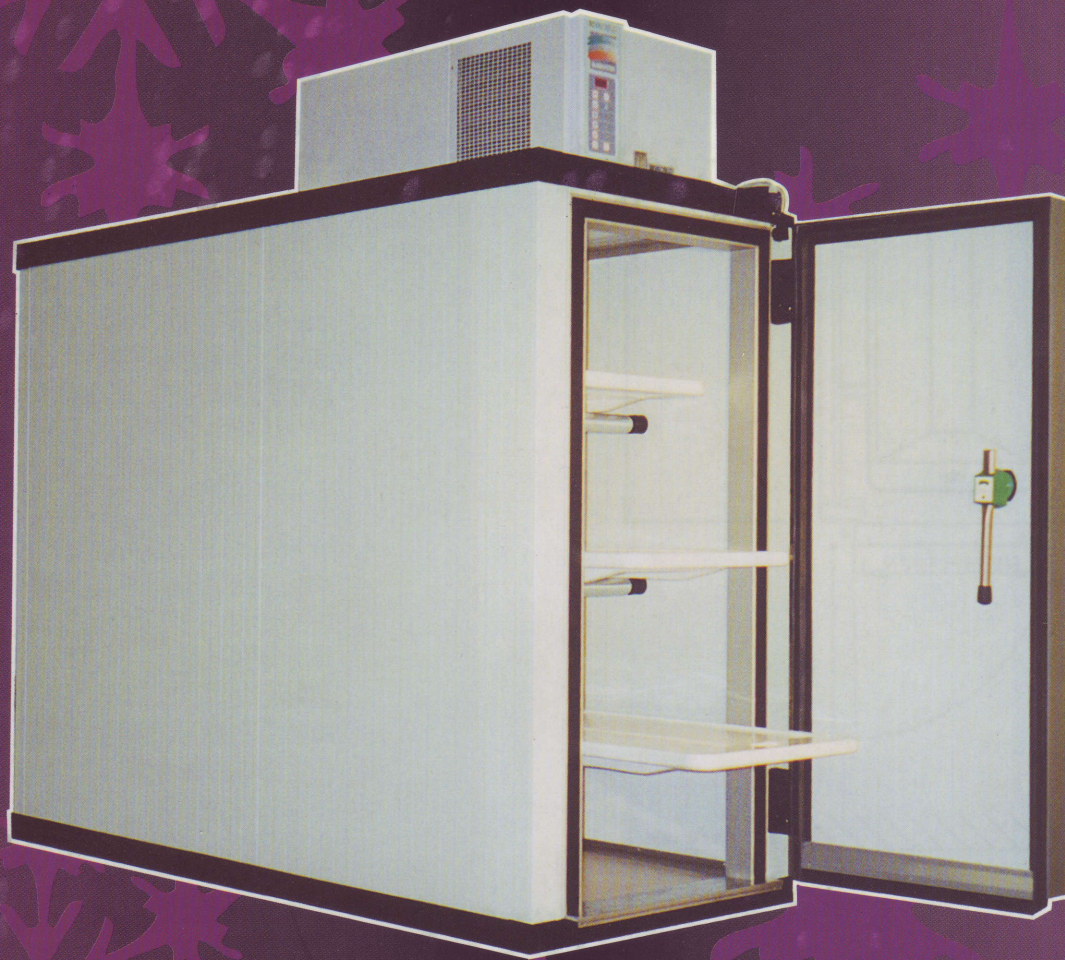

your complete solution



Our Polysec Compact Mortuary Chamber is specifically designed for clean, hygienic and energy efficient storage of up to three bodies, contained in the minimum of floor space and within a ceiling height of only 2.330 mtrs.

Insulation to walls, ceiling & floor is highly efficient polyurethane insulated panels. The insulated wall panels also totally enclose the roller support frame, leaving the interior clear of awkward dirt traps allowing easy cleaning.

Each Compact Mortuary Chamber is complete with three white chip resistant, reinforced ABS body trays supported off four captive rollers. Refrigeration equipment is self contained, ceiling mounted and ready to run, requiring connection to a standard 13 amp supply.

Installation is usually complete within an hour, installed by our engineers ready for connection to the electricity supply. Alternatively "flat-packed" for self assembly.

Multiple door & four tier options are available.

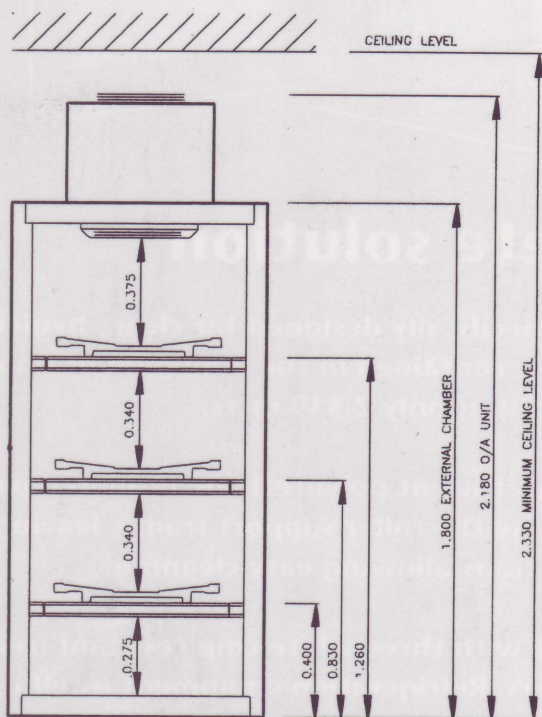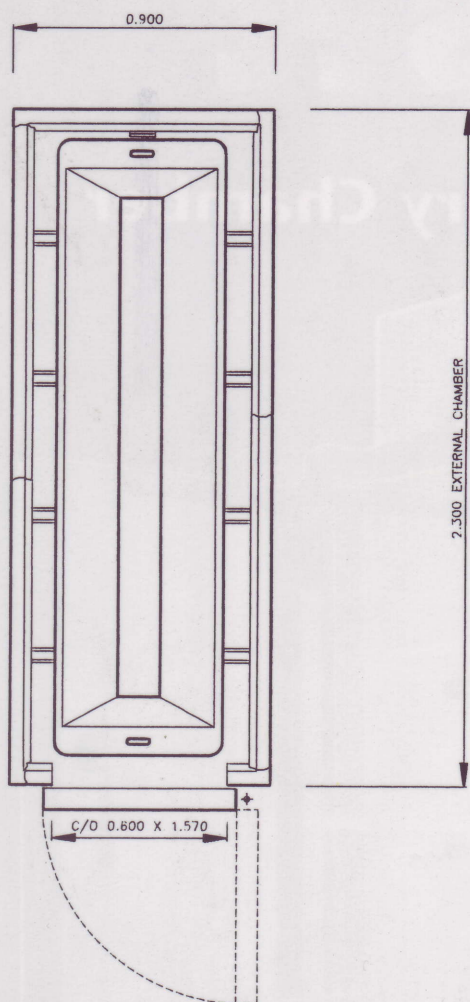

Dimensions: Are nominal as detailed adjacent.


Insulation: Walls, ceiling & floor are foam injected polyurethane, 75mm thick.

Finish: All exposed walls & internal ceiling are finished white "foodsafe" pvc coated galvanised steel. External ceiling & floor are finished self colour galvanised steel. Internal floor is texture grey pvc coated galvanised steel.

Internal fittings: Three off white reinforced ABS formed body trays 580W x 2100L, each tray is supported off four captive rollers.

Door: One off hinged door c/o 600W x 1570H, right hand hinged as standard, (left hand available to order), on rising polycarbonate hinges. Door handle is single 90° action opening mechanism, with integral lock and internal safety release. All doors include fully earthed and protected 240v heater trace.

Refrigeration equipment: Is pre-engineered, ceiling mounted "Blocksystem". Each unit incorporates a bulkhead light, complete with micro door switch and door heater supply. The "Blocksystem" requires free air supply, maximum ambient is assumed @ +35°C. Operating temperature +5/-5°C, 240/1/50 13amp supply required, 0.50hp, R134A refrigerant.

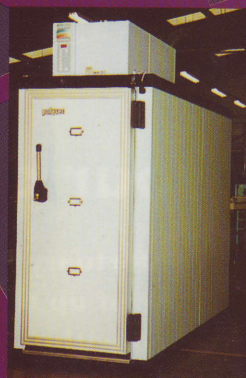

polysec

Coldrooms Limited

Blackpole Trading Est. West
Hindlip Lane
Blackpole
WORCESTER WR3 8TJ
Tel: 01905 458551
Fax: 01905 754137